

INSTRUCTION MANUAL

Safety Warnings

This product is only suitable for connection to a 240V~50Hz supply.

It is recommended that this light is installed by a qualified electrician in accordance with current IEE Wiring Regulations and Building Regulations (Part P).

The light fitting should be connected to a lighting circuit protected by a 5 amp fuse (or a 6 amp miniature circuit breaker).

These lights have an IP44 (splash proof) rating and can be used outdoors.

Run supply wire from a 5-amp electrical supply using double insulated 3-core cable of type H05RN-F 1.0mm² (not supplied) to selected site, ensuring it is adequately protected through the full length of the cable run, it must come out of the flat surface of the mounting surface in line with the entry to the fitting.

Except where installed in a conduit or duct, which provides equivalent protection against mechanical damage, a cable buried in the ground shall incorporate an earthed armour or metal sheath or both, suitable for use as a protective conductor, or be of insulated concentric construction. Buried cables shall be marked by cable covers or a suitable marking tape. Buried conduits and ducts shall be suitably identified. Buried cables, conduits and ducts shall be at a sufficient depth to avoid being damaged by any reasonably foreseeable disturbance of the ground.

We recommend that you do not stare directly into the light beam.

This product uses none-replaceable LED's.

This product contains glass parts – be careful during handling and maintenance to avoid breakage.

If any modification is made it will invalidate the warranty and may render the product unsafe.

The shade can become hot in use. Switch off and allow 10 minutes to cool before cleaning (using a dry cloth only – do not use liquid or abrasive cleaners).

If the glass covers are broken or cracked then they must be replaced immediately to preserve the water ingress protection, please consult your retailer. This is represented by the symbol



If any modification is made it will invalidate the warranty and may render the product unsafe.

Before you start

Please read these instructions carefully before fitting your new light and retain for reference.

Switch off the mains supply and remove the appropriate fuse or switch off the appropriate circuit breaker before commencing installation.

Ensure that no one else has access that would enable the supply to be inadvertently reconnected.

Check the packaging and make sure that you have all the required parts.

Follow each assembly step in order to prevent incorrect assembly

Make sure all screws / nuts, including electrical connections etc are fully tightened before use.

The Light pack contains:

Wall light and bracket.

Terminal connection block.

The following tools may be required:

Selection of cross and flat head screwdrivers.

Electric drill and assorted drill bits.

Wire strippers.

Electrical insulation tape.

These assembly diagrams are intended as a guide – if in doubt consult a qualified electrician.

Diagram A




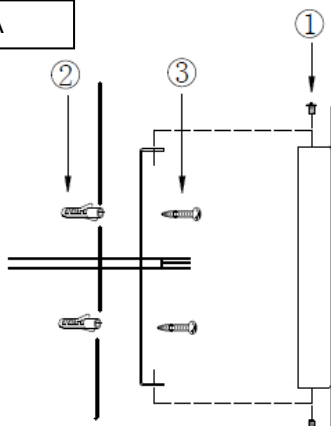


Diagram B




Wiring details

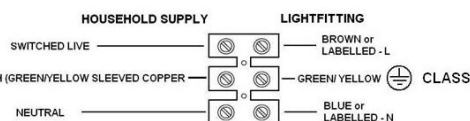

1. **Diagram A.** Determine the position of your light fitting taking into account the exit position of the cable. Ensure that the mounting surface is solid, preferably a brick or block wall and ensure that there are no other cables or pipes beneath the surface. Use appropriate fixings. Wall plugs are shown here. Ensure the fixings used can support the weight of the wall light.
2. Remove the fixing bracket, by undoing the 2 top screws (1), retain these for re-use.
3. Use the fixing bracket as a template to mark the screw holes. Make sure the bracket is vertical. Fix the bracket to the wall – the use of plugs (2) and screws (3) are shown here.

4. **Diagram B.** Support your fitting and connect the house wiring to the terminal block. The cable entry grommets must be securely in place to ensure that the water ingress protection is maintained. **NOTE: This is a Class I fitting and must be earthed.** Secure the terminal box lid – again this is to ensure that water does not enter the terminal block wiring.

Diagram C

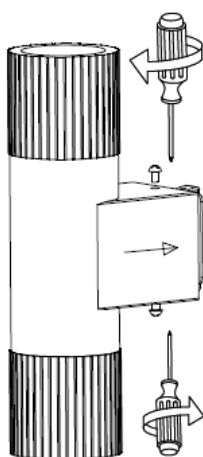

5. **Diagram C.** Re-position the fitting over the wall bracket - **MAKING SURE THAT THE FITTING IS THE CORRECT WAY UP AS PER THE ARROW INSIDE THE BACKPLATE** ↑ - and secure with the 2 side screws, removed in 2 above. Make sure that all the internal cables and connections are inside the back plate taking care not to trap or strain the internal cables.
6. Turn on the power and test.

Endon
LS9 0SE
20160323