


## Wiring

Having correctly identified the wiring from your light fitting, Pull the wire through the hole and connect to the terminal box back of the product in the following way:

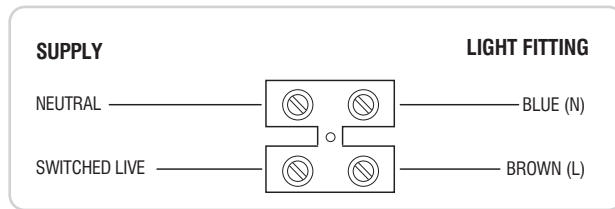

### Check that...

- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the terminal box.

## Technical Data

Supply Voltage: 220-240 V~, 50 Hz

Bulb Type: 14.5W LED module (SMD), CCT 3000/4000/6500K This product contains a light source of energy efficiency class **E**.



Conformity with all relevant UKCA Directive requirements.



Conformity with all relevant EC Directive requirements.



The power supply is Double Insulated and does not require connection to an Earth circuit.



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.



This product is not suitable for dimming.



This product is rated at IP44.

## Care and Safety

We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.

Mirror-Use a damp cloth or a proper glass cleaner. Do not use abrasive materials as these will damage the finish.

**Live Voltages may be present in this unit even when turned off or when completely disconnected.** For your safety, always switch off the power supply before changing lightbulbs, or cleaning.



The mirror must be replaced immediately should it become cracked or damaged. This fitting must not be used without the mirror in place.

For further information, please visit <https://www.lighting-info.co.uk/108280>

V3 19/10/2023

UK Manufacturer: BH17 7BY

EU Manufacturer: Brilliant AG,  
Brilliantstrasse 1, D-27442 Gnarrenburg

saxby  
lighting

Instruction manual

# Eclipse CCT

108280



[www.saxbylighting.com](http://www.saxbylighting.com)

saxby  
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

## Warning

 This power supply is Double Insulated and does not require connection to an Earth circuit.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Check the pack and make sure you have all the parts listed.

Install in accordance with the IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

This product is suitable for indoor use only.

This product contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

## Layout

Plan the desired layout of these fittings carefully, ensuring the cables will reach the distance between the Junction box and the light fitting.

Avoid locating any cables in positions that would cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.


The mains supply cable must have a minimum cross sectional area of 1.0mm<sup>2</sup>.

Cables in wall must be protected using suitable conduit or plastic trunking.

This product has special protection against the ingress of moisture.

This product is suitable for use bathroom zone 2 and outside zones of a bathroom only. Please see diagram on the right.

If this unit is being fitted in zone 1 a room containing a bath or shower, a 30mA RCD must be used - in accordance with IEE regulations.

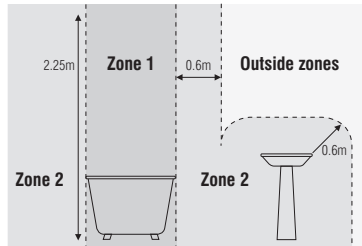

## Functions

1. Two buttons. Left is **Lamp Button** and Right is **Demist Button**.

2. When the fitting is connected to power first time, the demist function will be on, and it will automatic turn off after 60 minutes.

3. Lamp Button:

When the light strip is off, there is no backlight on the button.

Touch the lamp button to activate the strip and the lamp button will have white backlight.

Touch the lamp button again to turn on the strip (Default 3000K) and the Lamp button will have the blue backlight.


Touch the lamp button to change the color temperature (3000K-4000K-6500K-OFF).

Once the strip is off, long press the lamp button to turn off the backlight.

4. Demist Button:

Touch the demist button to turn the demist function on (with blue backlight) and off (with white backlight).

Long press the button to turn the backlight off.



## Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires.

Note that the switch is turned off before installation.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard and masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

Ensure the wall is capable of holding the weight of the product. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick, cavity walls or plasterboard.

If mounting, note the position of the "This Way Up" label or marked on the back of the product and ensure it is correctly oriented.

Small size mirror has a group of mirror-hanger and wall-hanger only.

- Drill two holes(Dia: 8mm, depth 50mm) on the wall, and the distance between two holes is 26mm.
- Put the dowels into the holes, Screw up wall-hanger on the wall. Ensure the wall-hanger is level.
- Pull the supply cable through the hole in the wall back, and connect the cable to terminal block, ensure correct polarity: brown cable refer to Live wire(L) and blue Nature wire(N); -----The terminal box is a selective module.
- Get the mirror hang to the wall-hanger that fixed on the wall already. Ensure that the product is level.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Installation accessories:

