

## New Classics Collection

### Assembly Instructions for Stanford 21 Light Pendants

Please read the instructions carefully before starting work and retain for future reference.

Always turn off the mains supply at the consumer unit, shut off the circuit breaker, or remove the circuit fuse before commencing installation.

This fixture should only be installed by a qualified electrician.

This fixture is suitable for indoor, non-bathroom, use only.

This product is heavy (13kg)! Ensure that the mounting position is strong enough to hold the fitting, and get assistance during installation and maintenance.

#### Installation:

1. Screw tube (L) onto threaded post (W), and attach assembly to top of main fitting (R). If you want to reduce the height of the fitting, unscrew threaded post (Q) and remove tube (K), then screw threaded post (W) directly onto hoop (U)
2. Weave the cable through the chain links (J). Affix the bottom carabiner link (X) to fixture loop (U), and then top carabiner link (I) to loop (S)
3. If using shades (T) (not supplied), place short candle drip (N) over the lampholder (O), followed by the shade and secure in place using the shade ring (M). Otherwise use the longer candle drip (N1)
4. Install bulbs. **Do not exceed the maximum wattage recommended on the candle sleeve.**
5. Use the mounting bracket (D) to mark screw holes, and a hole for the mounting hook.
6. Place hook (V) through the bracket (D) and tighten with nut (P). Affix to the ceiling (A) using appropriate fixings (B&E).
7. Lift the fitting, with assistance, to connect hook (V) onto the loop (F).
8. Connect the house supply to the terminal block (C), according to the wiring diagram in Fig. 2, ensuring that the terminal screws are tightened securely and that there are no stray wires. If there is more than one supply cable present, seek professional advice.
9. Raise the ceiling cup (G) to the mounting bracket (D), and then secure with the lock washers (H) and screws.

Figure 1


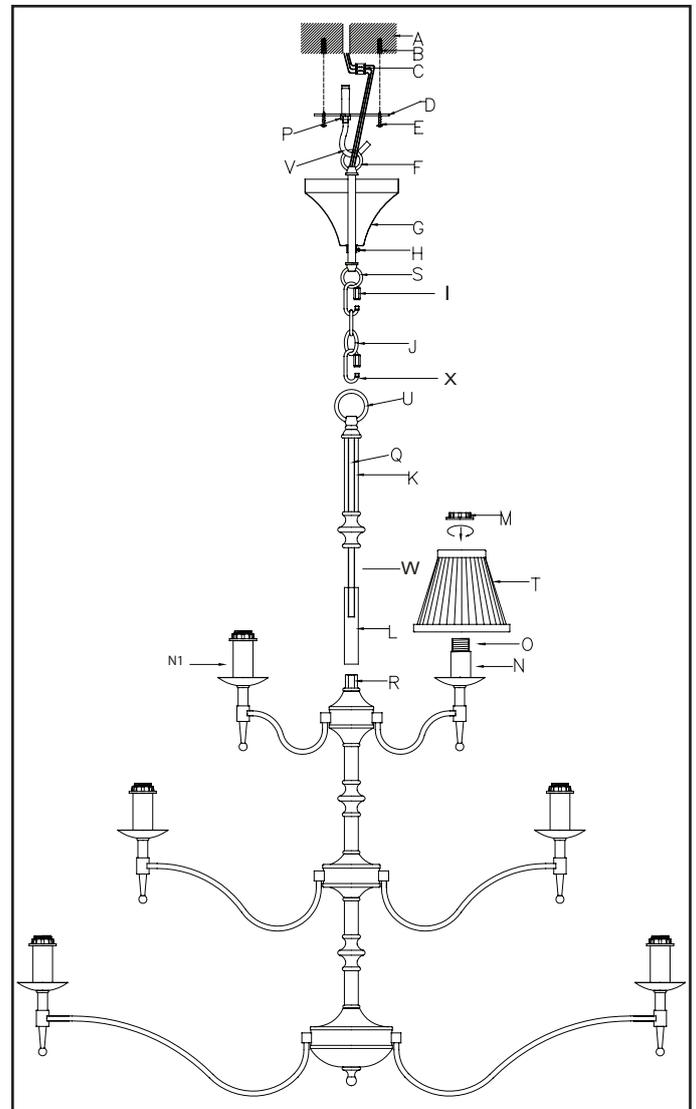


Figure 2

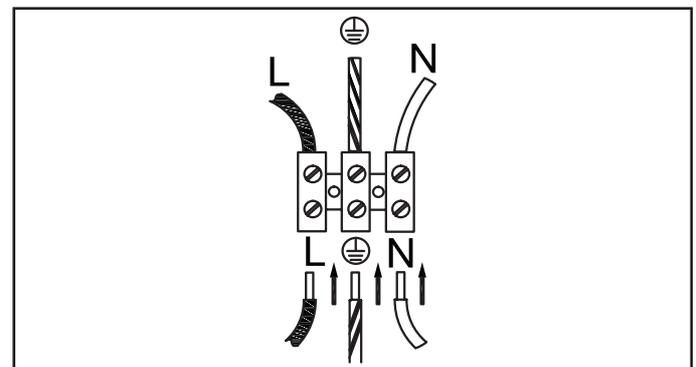

This instruction is suitable for item numbers:

CA1P21N  
CA1P21B