



## Commissioning

- Re-position the fitting over the wall bracket and secure with the 2 side screws –Diagram B. Make sure that all the internal cables and connections are inside the back plate taking care not to trap or strain the internal cables.
- Fit the correct bulbs, as stated on the product label – Diagram C. Never exceed the maximum wattage stated.
- Carefully screw the 2 glass shades onto the body of the fitting, making sure that the rubber threaded seals are in place (this is to ensure water ingress protection is maintained).
- Re-connect the power and test the fitting using the pull switch

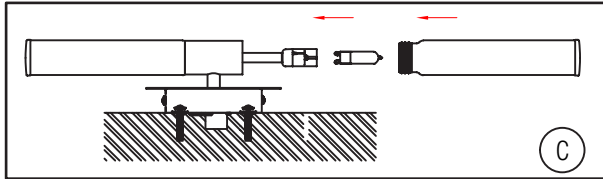


## Fitting/replacing bulbs

- When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Used bulbs should not be disposed of with household waste. Please recycle where facilities exist.
- Always use the correct type and wattage bulb. Using the incorrect wattage bulb will damage the product.
- Use a soft cloth to handle bulbs, avoid directly touching the bulbs as this will shorten their life.
- Remove the glass tube. Pull the bulb out to remove.
- Push the new bulb in, and refit the glass tube.




- We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.

## Recycling advice

-  Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

## Safety information

For your safety, always switch off the supply before changing lightbulbs, or cleaning.

-  This bulb is protected by a glass shade. This part must be replaced immediately should the glass shade become cracked or damaged. This fitting must not be used without the glass shade in place.

## Instruction leaflet

# Romford Bathroom Light

EL-257-WB



**ENDON®**

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

## Warning

**This is a Class 2 product and must NOT be earthed.**

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other

persons cannot restore the electrical supply without your knowledge.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

This product is not suitable for dimming.


This product contains delicate parts - handle with care during installation and maintenance.

## Specification

Voltage: 240V 50Hz a.c.  
Lamp: 2x 25W G9 clear capsule  
IP rating: 44

## Layout

- Plan the desired layout of this fitting carefully, ensuring the cables will reach the distance between the junction box and the light fitting.
- Avoid locating any cables in positions that would cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.
- Cables in walls must be protected using suitable conduit or plastic trunking.
- The mains supply cable must have a minimum cross sectional area of 1.0mm<sup>2</sup>.
- This product must be mounted out of arms reach.
- This product no has special protection against the ingress of moisture.

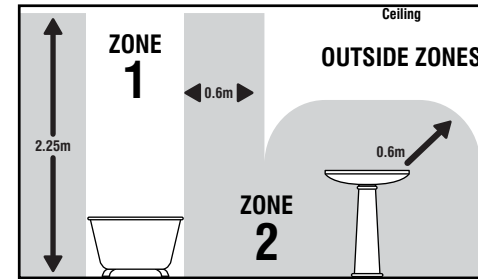

This product is IP44 rated, and is suitable for use in 1, 2 and outside Zones of a bathroom. See diagram.



If this unit is being fitted in a room containing a bath or shower, a 30mA RCD must be used - in accordance with IEE regulations.

## Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires.**

- Remove the fixing bracket, by undoing the 2 side screws, retain these for re-use.

- Make a small hole in the rubber grommet in the back plate, pass the mains cable through this grommet and then use the back plate as a template to mark the screws holes. Make sure the bracket is horizontal. Fix the bracket to the wall using appropriate fixings (dia. A)
- Wire as detailed below.

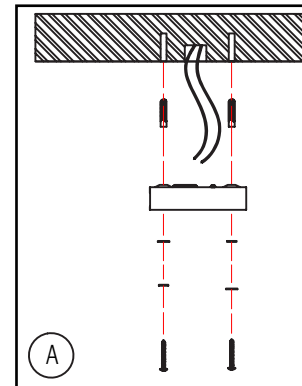

## Wiring

Having correctly identified the wiring from your existing light fitting, pull the wire through the hole and connect to the connection block inside the product in the following way:

## Check that...

- You have correctly identified the wires
- The connections are tight
- No loose strands have been left out of the connection block.

