

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

Check the pack and make sure you have all of the parts listed.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting.

Ensure other persons cannot restore the electrical supply without your knowledge.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

Always switch off mains supply before fitting or servicing.




All pre-cut mains tracks, is supplied complete with ready inserted dead end insulation caps and live end.

It is recommended that luminaires are installed by a qualified electrician who should ensure that the installation complies with the current IEE wiring regulations BS7671:2008.

Any broken or damaged parts should be replaced as soon as possible.


Saxby will not accept responsibility for any claims arising from a sub-standard installation.

Technical data


Supply Voltage:	240V~, 50 Hz	16 Amp max	Power load : Max. 3840W
	Conformity with all relevant EC Directive requirements.		
	Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.		
	Class I product, must be connected to earth.		
IP20			

Layout


This track system can be extended to a variety of different configurations using accessories such as left bends, right bends, T junctions, X junctions and flexible joints.

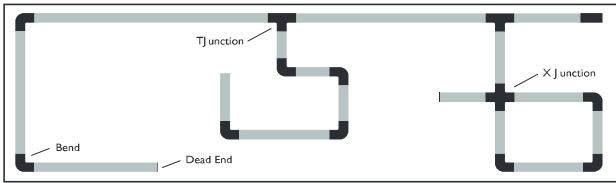

Track accessory

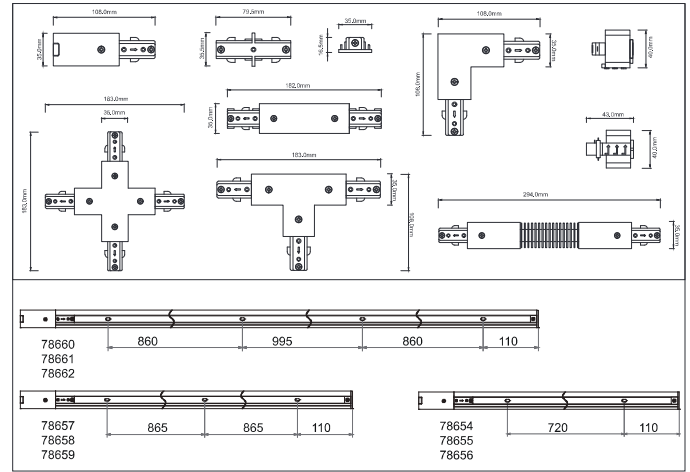

Installation

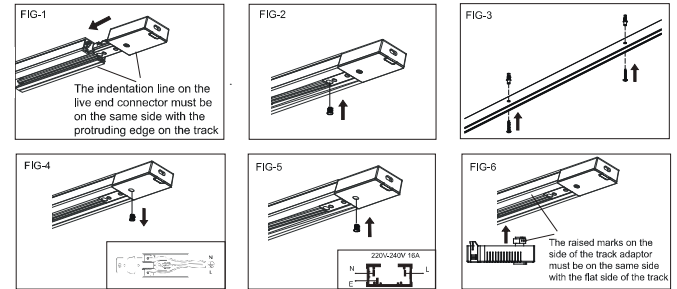

Cutting track

When reducing the length of track i.e. cutting down. It is recommended that a piece of masking tape be wrapped around the intended cutting area, this will ensure the powder coated or plated finish does not lift and chip. It is recommended for a good electrical connection the installer should always mark out and cut track accurately using an engineers square prior to cutting. Ensure the copper conductors are pushed fully to one end of the track prior to cutting, the conductors should be towards the live end termination point