

Product Code 05-2019-14-14 Installation Instructions 3D File Photometry Dialux | ULD Revit (BIM)



# Oval 300mm

Wall fixture Oval 300mm LED 11.2 LED warm-white 3000K PHASE CUT White 877lm

## Technical features

Luminaire total power: 11.2W Real lumens: 877 Real lm/W: 78 Correlated Colour Temperature (CCT): LED warm-white 3000K UGR: <=22 Structure material: Aluminium, Steel Structure finish: White Driver Brand: HEP Voltage / frequency: 220-240V/50-60Hz Dimming protocol: PHASE CUT Power Factor: 0.90 Useful life: 50,000h L80B20 Warranty: 5 años Easily recyclable luminaire



#### Luminotechnic features

CRI: 90

MacAdam steps: 3 Photobiological risk: RG1 UGR crosswise: 15.1 UGR lengthwise: 21.9

Lampholder	Quantity	Light source power (W)
LED	1	9W

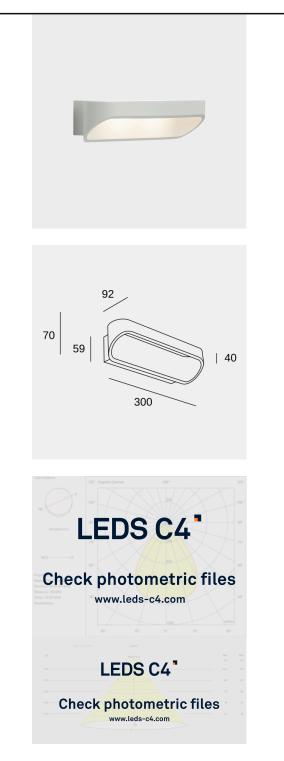


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Product Code 05-2019-14-14 Installation Instructions 3D File Photometry Dialux | ULD Revit (BIM)



## Oval 300mm

Wall fixture Oval 300mm LED 11.2 LED warm-white 3000K PHASE CUT White 877lm

### Logistics



Net weight (kg): 0.88 Packaged weight (kg): 1.2 Packaging: 335mm x 110mm x 115mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.