



The photograph may not match the reference exactly. Please read the product description to identify the finish.

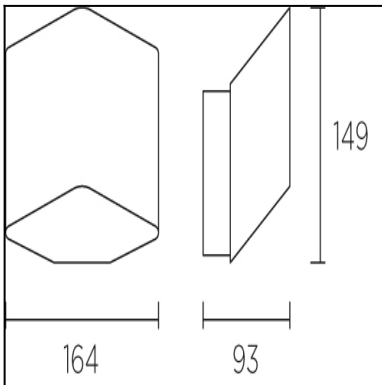

[Download photometric file .ldt / .ies](#)

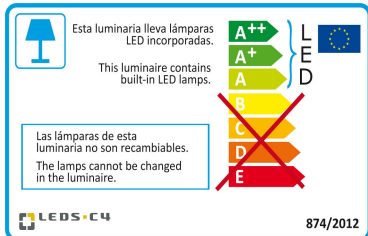

[Click on image to download energy label](#)

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP20
Light source 1:	1 x LED Sharp 7.5W Warm White - 3000K 700 lm ^(N) CRI 80
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee (Years):	5
Units per box:	12
Net Weight (Kg):	0.56
EAN:	8435381421298



MATERIALS / FINISHES

Structure material: Extruded aluminium
Steel

Structure finish: Matt white

GEAR

Multi-voltage electronic gear included (100-240V / 50-60Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.


Leds-c4 reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.

Please consult the sales team to clarify any doubt.

Luminaire		Measur.		Lamp		
Code	05-3980-14-14	Code	05-3980-14-14	Code	LQL	
Name	7.5W wall light	Name	7.5W wall light	Number	1	
Line	IESNA-1995	Date	27-10-2014	Position		
Efficiency	8.55%	Coordinate system	CG	Total Flux	493.70 lm	
Maximum value	12.10 cd	Position	C=0.00 G=2.00	Rotosymmetrical		
Rectangular Luminaire	Length	1 mm	Width	1 mm	Height	1 mm
Rectangular Luminous Area	Length	1 mm	Width	1 mm	Height	0 mm
Horizontal Luminous Area	0.000001 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.000000 m2		
Symmetry Type	Rotosymmetrical	Maximum Gamma Angle		90		
Measurement Distance	0.00	Measurement Flux		493.70 lm		
Operator		Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
IESNA-1995	LQL	7.5W wall light - 10.30 W	493.70	10.30	1	
C.I.E.	41 72 92 100 9	D DIN 5040				A30
F UTE	0.09 G	B NBN				BZ 5


1mm x 1mm





C Halfplanes

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 8.55 %
 RN 0.00 %

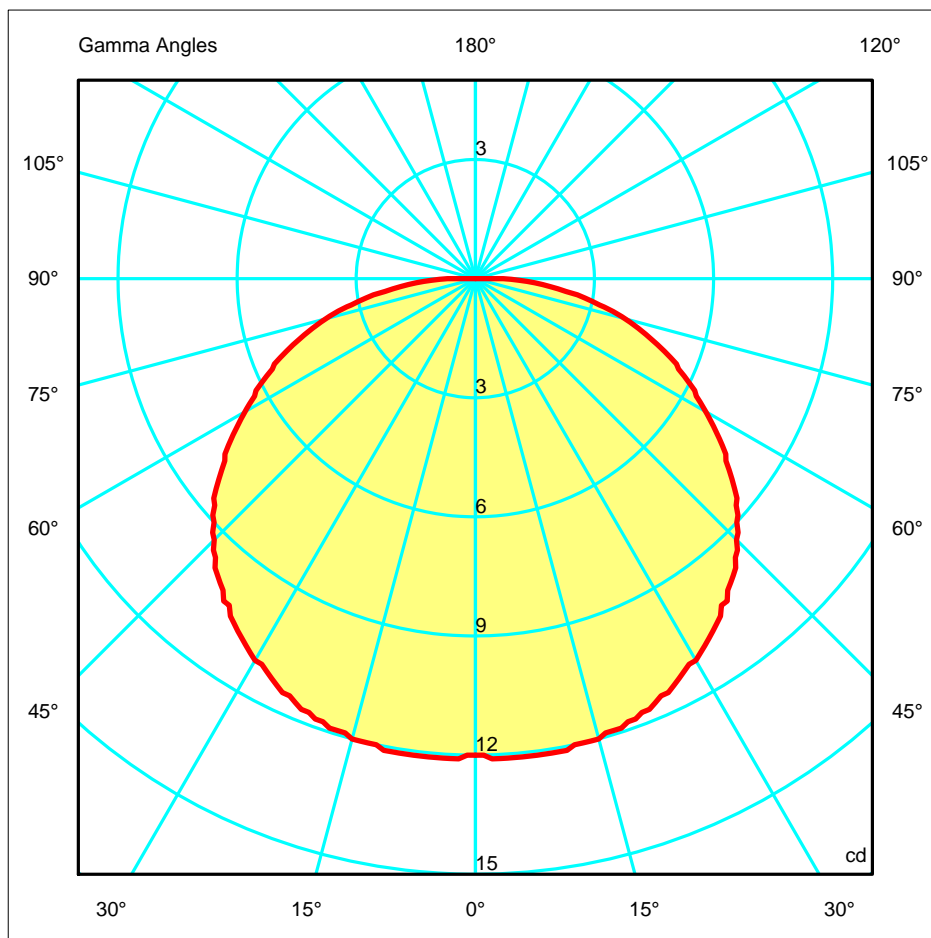


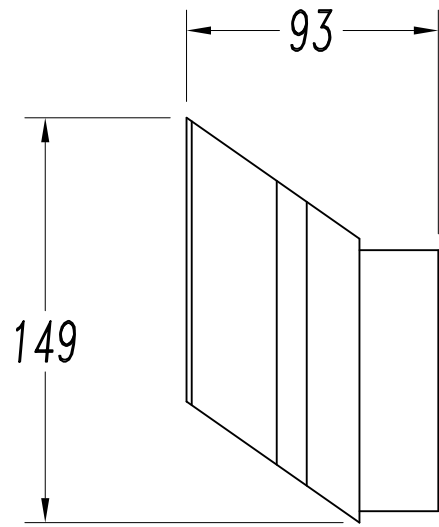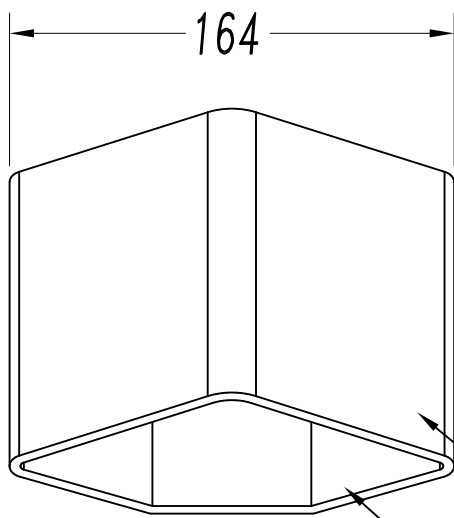


AL /satin Aluminium
or matt white

AL / matt white


Steel /Silver or matt white

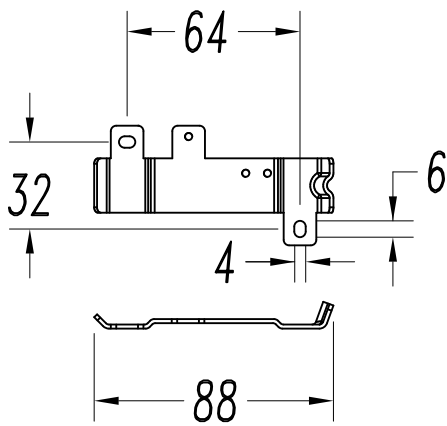


1

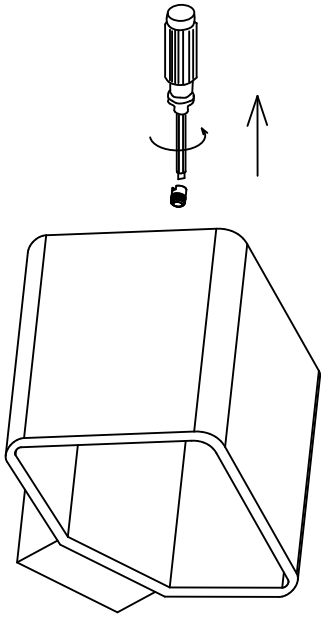


2

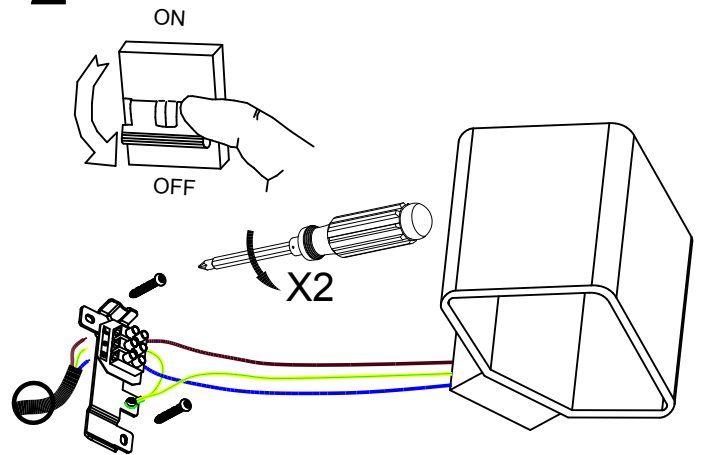


3

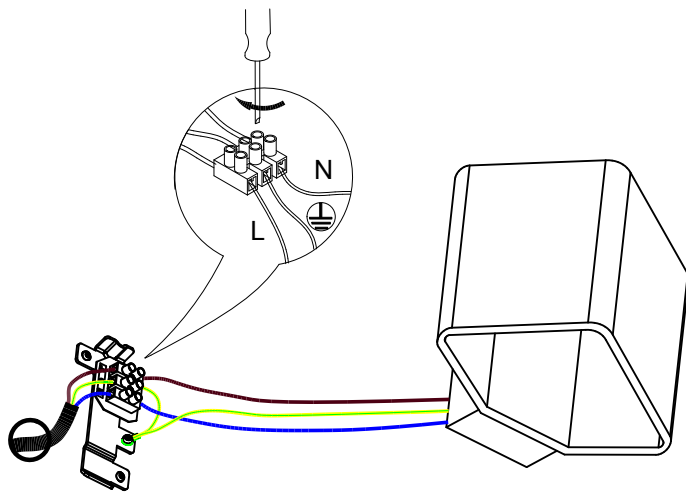

4

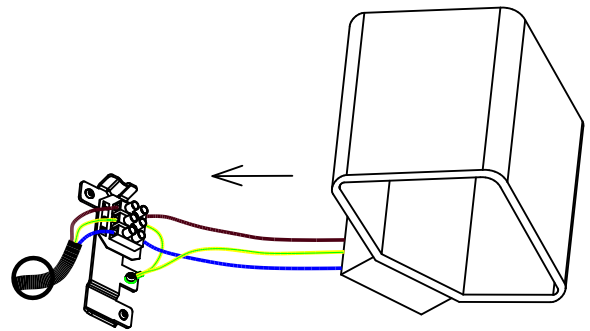

5

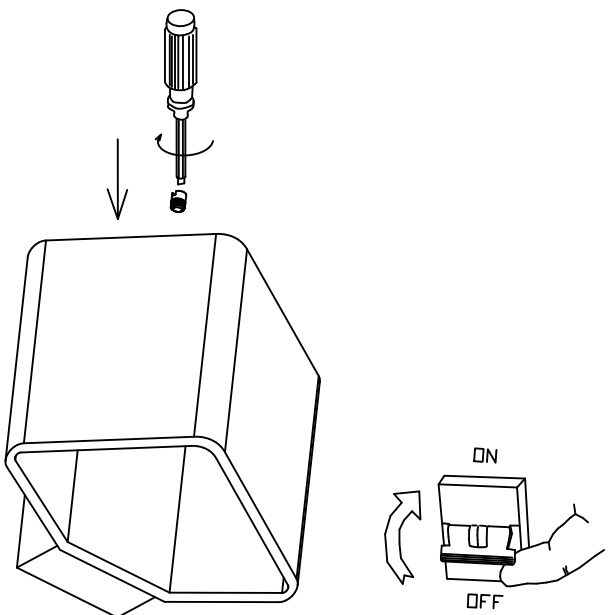

6

