























200 W max. (LED-ready)

IP20

**Function description** 

The new universal wizard. Lighting automation made easy: the easy sensor switch is a revolutionary world first. It works in both as 2 and 3-wire installations and can switch all type of lamps ON and OFF. Simply replace existing flush-mounted switches – done! With 180° infrared sensor (8 m reach) and button for manual switching.

## **Technical specifications**

Dimensions (L x W x H)	57 x 81 x 81 mm
With motion detector	Yes
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	No
Version	Concealed wiring
PU1, EAN	4007841055790
Туре	Motion detectors
Application, place	Indoors
Application, room	corridor / aisle, function room / ancillary room, kitchenette, stairwell, WC / washroom, Indoors
Colour	white
Colour, RAL	9010
Includes corner wall mount	No
Installation site	wall
Installation	Concealed wiring, Wall
IP-rating	IP20

Switching output 1, low-voltage halogen lamps	200 VA
LED lamps < 2 W	40 W
LED lamps > 2 W < 8 W	100 W
LED lamps > 8 W	160 W
Capacitive load in μF	132 μF
Sensor Technology	Passive infrared
Mounting height	1,10 – 2,20 m
Mounting height max.	2,20 m
Optimum mounting height	1,1 m
Detection angle	180 °
Angle of aperture	90 °
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	No
Mechanical scalability	No
Reach, radial	$r = 2 \text{ m } (6 \text{ m}^2)$




# **Technical specifications**

Ambient temperature	0 – 40 °C	
Material	Plastic	
Mains power supply	220 – 240 V / 50 – 60 Hz	
Switching output 1, resistive	200 W	
Switching output 1, number of LEDs / fluorescent lamps	4 pcs.	
Fluorescent lamps, electronic ballast150 W		
Fluorescent lamps, uncorrected	150 VA	
Fluorescent lamps, series-corrected 150 VA		
Fluorescent lamps, parallel- corrected	150 VA	


Reach, tangential	$r = 8 \text{ m} (101 \text{ m}^2)$
Twilight setting	2 – 1000 lx
Time setting	5 s - 30 Min.
Basic light level function	No
Main light adjustable	No
Twilight setting TEACH	No
Constant-lighting control	No
Interconnection	No




### **Dimension Drawing**

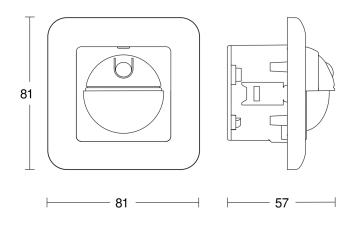

### 2-wire circuit diagram



# 3-wire circuit diagram



# Circuit diagram for interconnecting several sensors

