LEDS C4



10-E055-DC-CL

V0

ROW Beacon

Designer: No

Description
Wall light for outdoor use.

For downlighting. Includes base with "PRO-base SYSTEM" to ensure perfect installation and make the light more stable and durable. Suitable for installation in marine environments. Includes 2 cable outlets to facilitate chain mounting. Structure material: cement. Structure finish: cement. Diffuser material: Polycarbonate. Diffuser finish: Matt opal. UV protection. Warranty: 5 Years.

Finish
cement
Matt opal

Material
cement
Polycarbonate

IP65 IK10

TECHNICAL CHARACTERISTICS

Light source
Light source: LED SAMSUNG
Output (W): 17.4W
Total power consumption (W): 19.3
Color temperature: Warm White - 3000K
CRI: 80
Photobiological risk: RG1
Real Lumen: 1071
Qty Leds: 60
Lm/Real W: 55
Life Time: 56.000h L90B10
Bin / Grup: VA o VB
MacAdam steps: 3
UGR: 23.3

GEAR
Brand: HEP
Gear included: Yes, electronic
Voltage / Frequency: 100-277 VAC
Power Factor: 0.91
Flickering: 25%

Luminaire
Double cable exit: Yes
Drainage: No
Seaside: Yes
Uv Protection: Yes
Warranty: 5 Years

Logistics
Energy Efficiency: LED A++
EAN Code: 8435526873791
Net Weight (Kg): 0.000

The photograph may not match the reference exactly. Please read the product description to identify the finish.

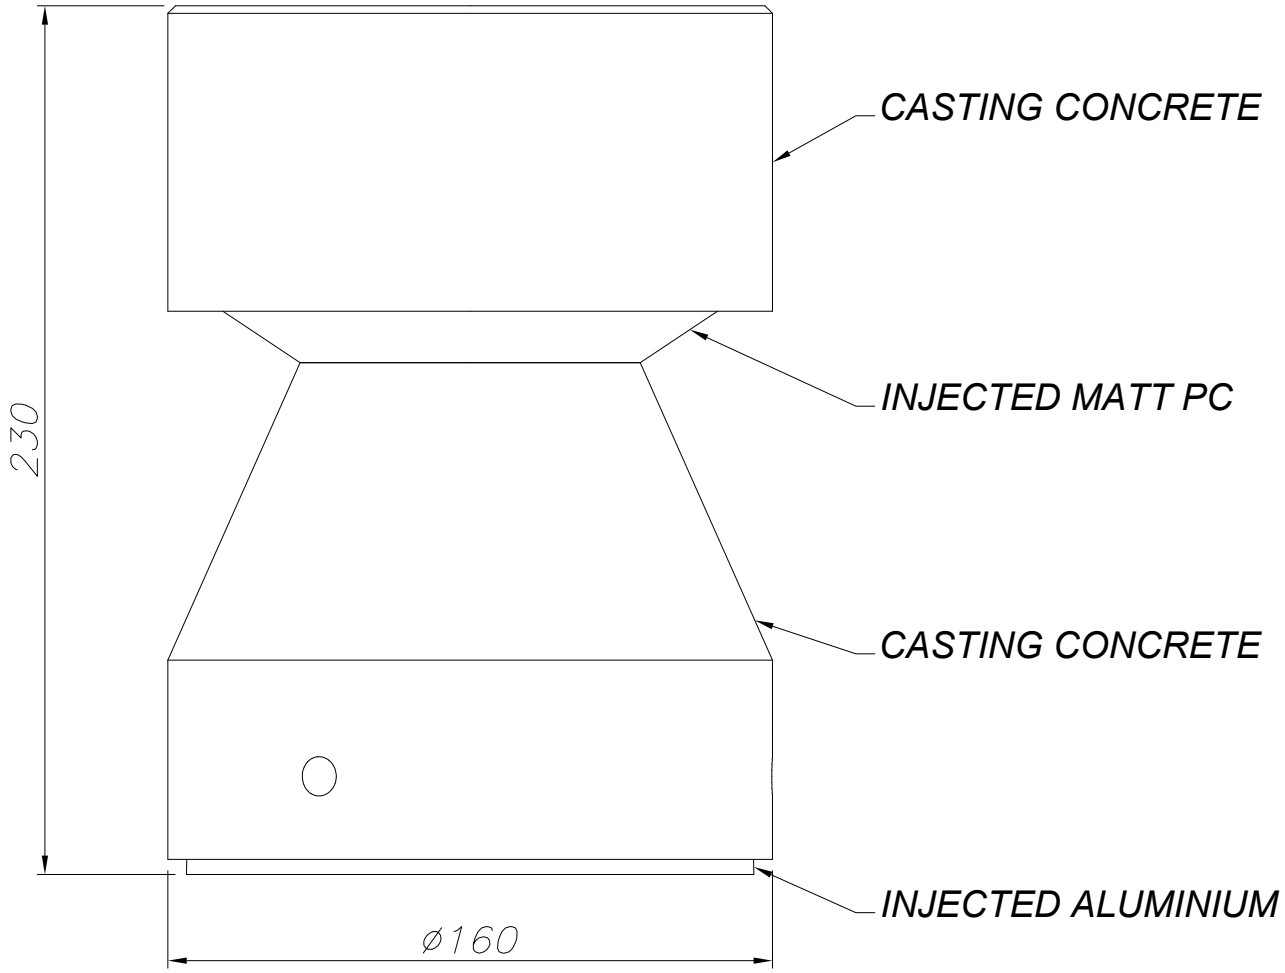

INSTALLATION TEMPLATE

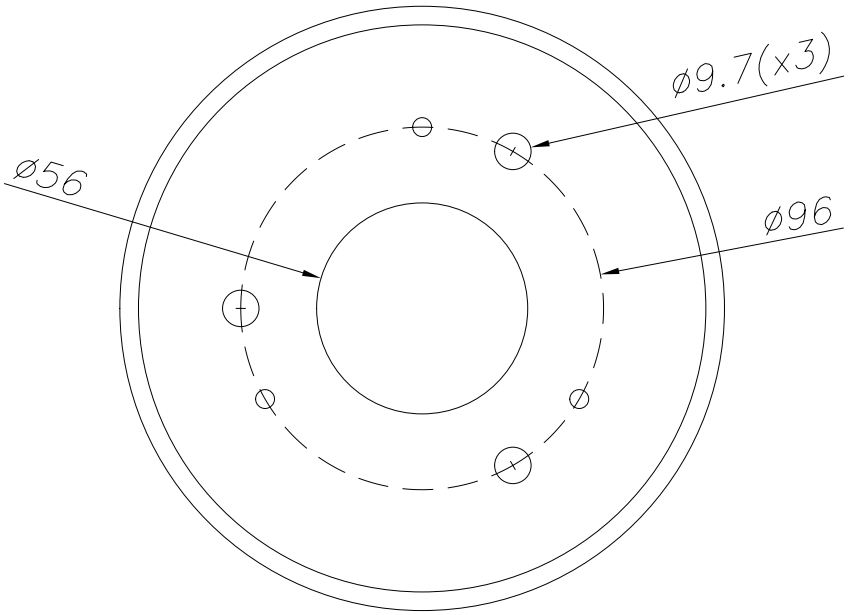

LEDS C4

10-E055

1

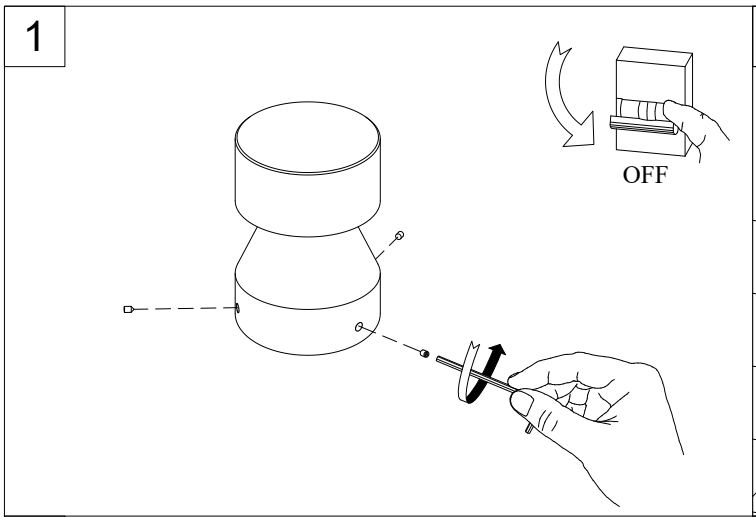

2

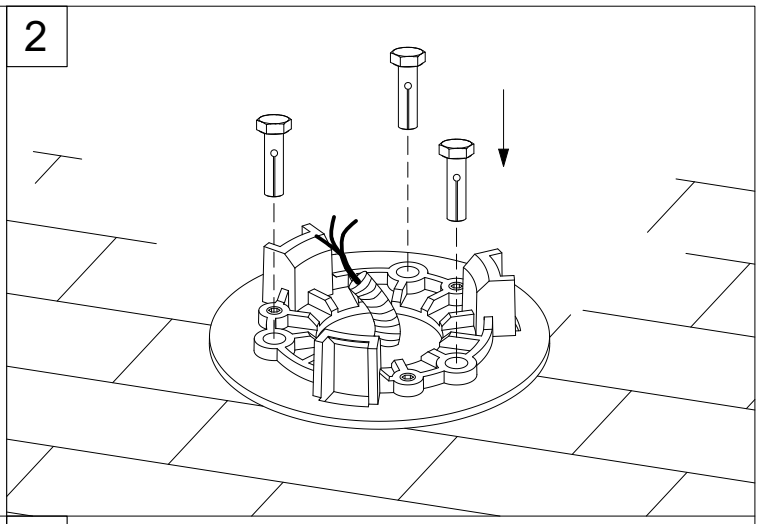

3

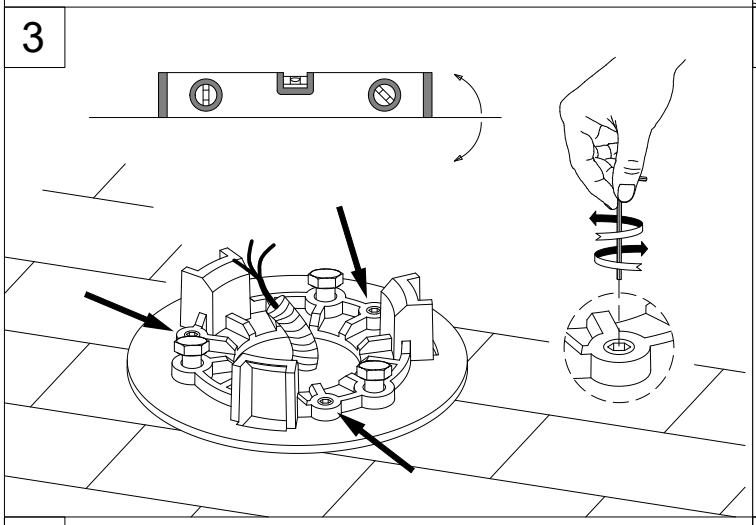

4

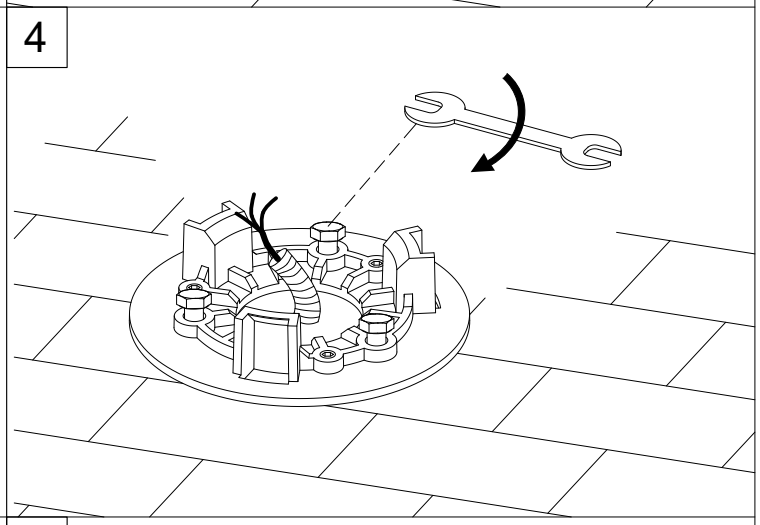

5

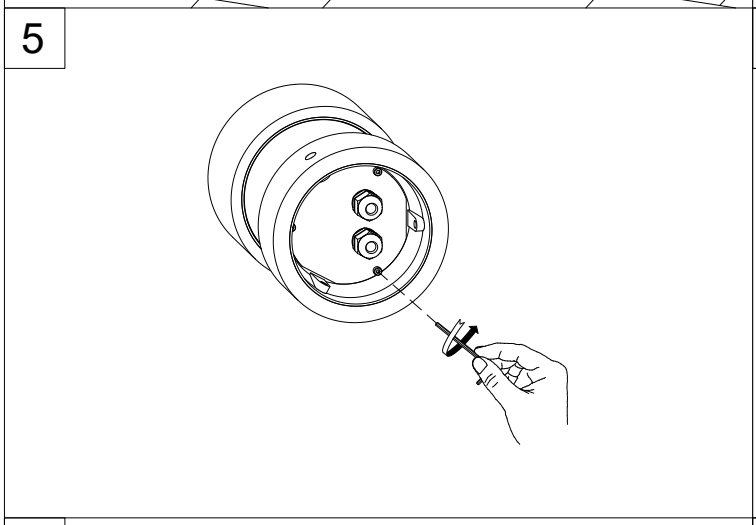

6

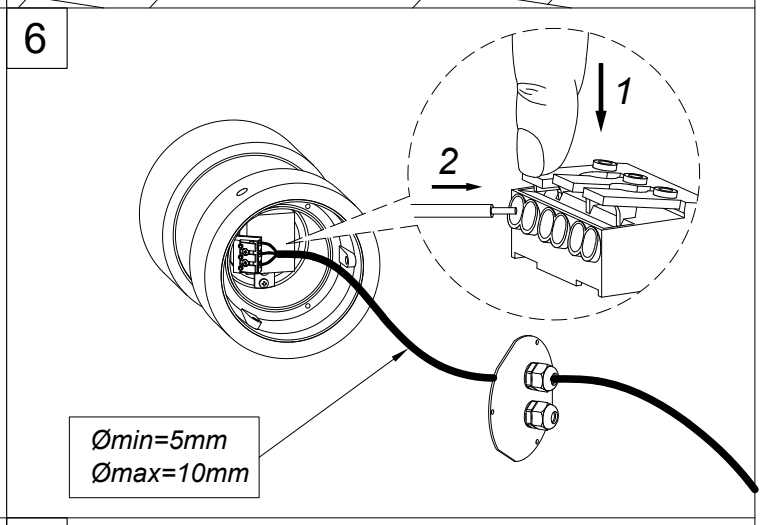

7

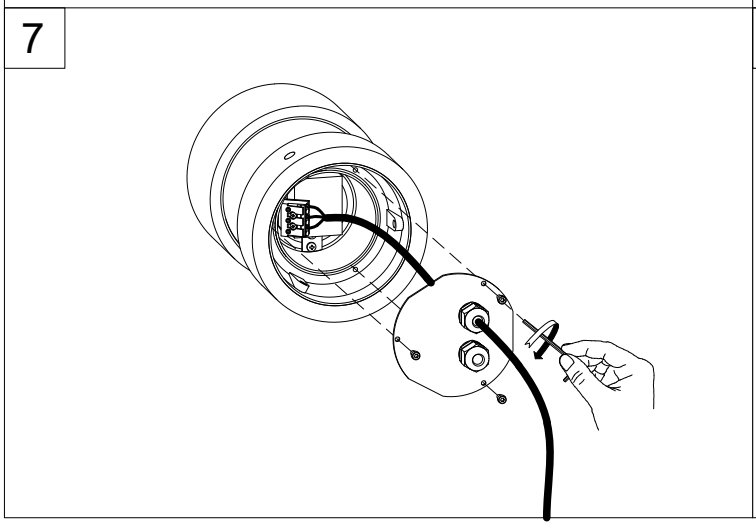

8

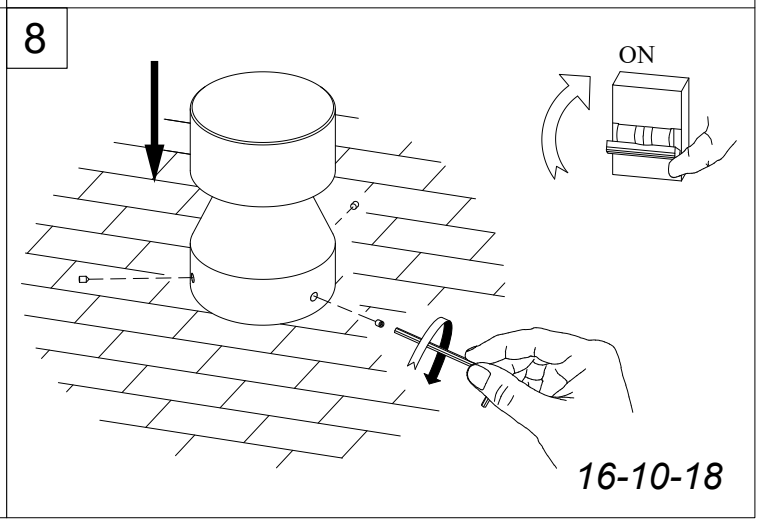

16-10-18