Product Code 15-8514-05-05 Installation Instructions 3D File Photometry



Prolix Double

Nahtrang Design

Spotlight Prolix Double 13.6 LED warm-white 2700K CRI 90 PHASE CUT Black 434lm

Technical features

Luminaire total power: 13.6W

Real lumens: 434 Real lm/W: 32

Correlated Colour Temperature (CCT): LED warm-white 2700K

Lens / reflector angle: FLOOD 48°

UGR: <=16

Structure material: Aluminium

Structure finish: Black

Diffuser material: Methacrylate Diffuser finish: Transparent

Driver Brand: HEP

Voltage / frequency: 220-240V/50-60Hz

Dimming protocol: PHASE CUT

Power Factor: 0.48

Useful life: 50,000h L80B20

Warranty: 5 años

















Luminotechnic features

TM30 RG: 100 TM30 RF: 91

Melanopic ratio: 0.511

CRI: 90

MacAdam steps: 3

Photobiological risk: RG2

UGR crosswise: 5.6 UGR lengthwise: 5.6

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	2	5.9W	LED warm- white 2700K






Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Product Code 15-8514-05-05 Installation Instructions
3D File
Photometry



Prolix Double

Nahtrang Design

Spotlight Prolix Double 13.6 LED warm-white 2700K CRI 90 PHASE CUT Black 434lm

Logistics



x 20

Net weight (kg): 0.84

Packaged weight (kg): 1.04

Packaging: 220mm x 165mm x 105mm

Light application

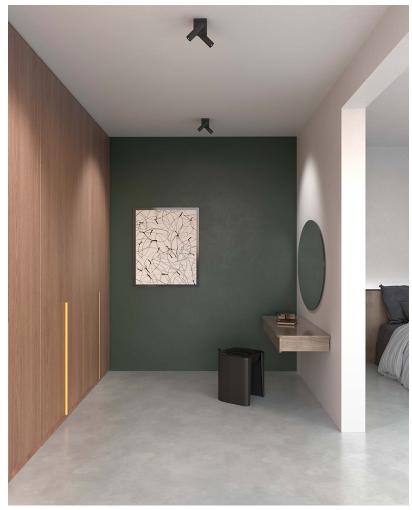


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.