

TRIMLESS SQUARE FIRE-RATED LED 5703

SKU 1248012

astro



PRODUCT SPECIFICATION

GENERAL

FINISH:	Matt White	CABLE LENGTH:	450 (mm)
MAIN MATERIAL:	Metal - Mild Steel	GROSS WEIGHT:	1.17 (Kg)
DIMENSIONS:	H:75mm W:75mm D:112mm	CLASS:	CE (Class III)
INSTALLATION ORIENTATION:	Ceiling Mount - Install into new ceiling	IP RATING:	IP20
CUT OUT HOLE:	L: 83mm W:83mm	BATHROOM ZONE:	Zone 3
RECESS DEPTH:	132 (mm)	VOLTAGE:	Constant Current 700 (mA)
FIRE RATING:	90 min	PRODUCT F MARK:	Not Suitable for covering with thermal insulation

LAMP


LIGHT SOURCE:	COB LED	MACADAM ELIPSE:	3-Step
MAXIMUM WATTAGE:	6.8W	UGR:	To Be Advised
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	40 (Degrees)
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	475.1 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	2700 (K)	AVERAGE LIFESPAN:	36,300 (Hrs)
CRI:	80	L70:	To Be Advised
R9:	4.9		

ELECTRICAL

SWITCHED:	No	SUPPLY FREQUENCY:	Not Applicable
DIMMABLE:	Yes	DRIVER/BALLAST VOLTAGE:	Not Applicable
DIMMING METHOD:	Control Gear Dependant	DRIVER AVERAGE LIFESPAN:	Not Applicable
DRIVER OUTPUT CURRENT:	Not Applicable	EFFICACY:	50.54 (lm/W)
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER/BALLAST INCLUDED?	No

ADDITIONAL INFORMATION


Product tested with 1836 - LED Driver CC 250/350/500/700mA DALI Dim



BOX QUANTITY x 8



PRODUCT ELEVATIONS

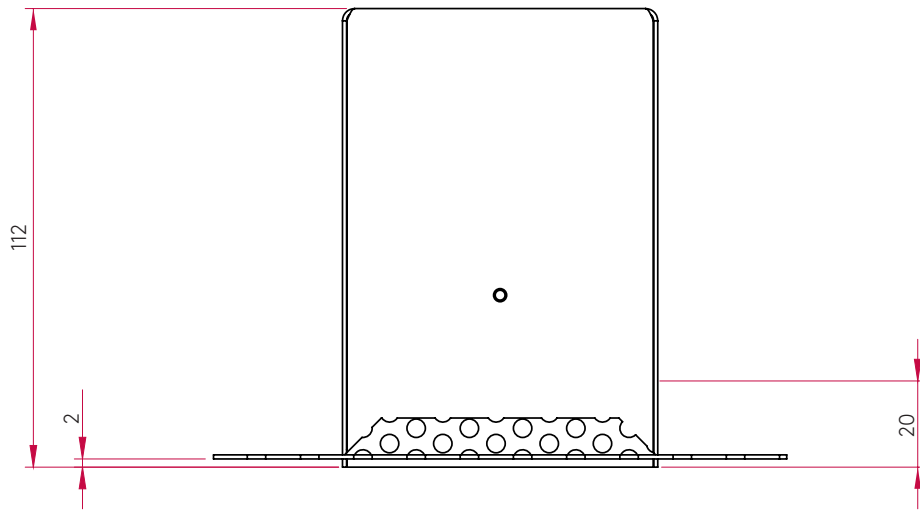

CUTOUT 80X80MM Ø114MM

