


Wiring

Having correctly identified the wiring from your existing light fitting, pull the wire through the hole and connect to the connection block in the following way:
This unit is double insulated and must not be earthed. If

there are any incoming earth cables, they must be joined together and well insulated with good quality insulation tape. This is to ensure earth continuity throughout your property.

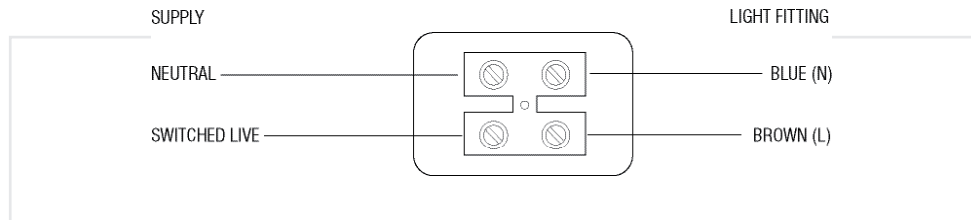

Check that...


- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the connection block.

replacing bulbs

- Unclip the front bezel and let the bulb drop out.
- Twist the pins into the lampholder, and twist back into the product.
- Clip the front bezel back in position.

Care and Safety

- We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.
- Always disconnect the product from mains at least 10 minutes allowing to cool down before any maintenance or adjustment.

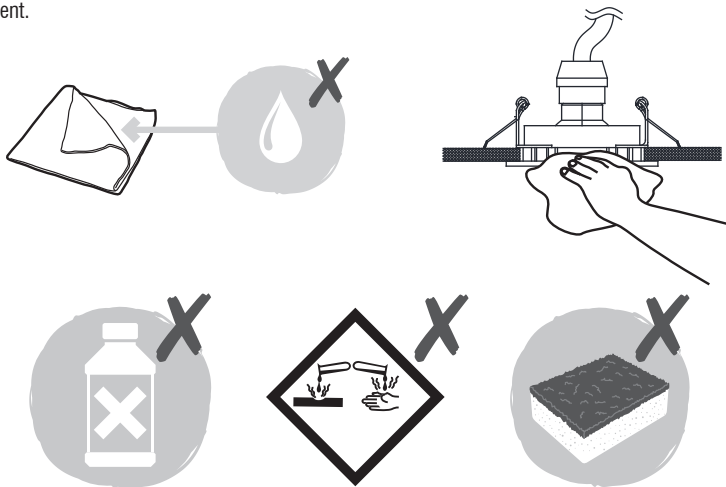

Iss .2 7/11/2018

Instruction leaflet

Xeno Recessed

78530, 78531, 78532



CE

saxby
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

Check the pack and make sure you have all of the parts listed.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting.

Ensure other persons cannot restore the electrical supply without your knowledge.






If replacing an existing fitting, make a careful note of the connections.

This light fitting should be connected to a fused circuit.

Always use the correct type and wattage bulb. Never exceed the wattage stated.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Technical data

Supply Voltage:	240 V~, 50 Hz	
Bulb Type:	1 x Max. 50W GU10 - (78530)	2 x Max. 50W GU10 - (78531)
	3 x Max. 50W GU10 - (78532)	
	Conformity with all relevant EC Directive requirements.	
	Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.	
	Class II product - Double Insulated - No earth required.	
	This product is suitable for dimming.	
	Minimum distance from lighted objects (0.5 metres)	
	This product is NOT suitable for direct mounting on normally flammable surfaces (suitable only for mounting on non-combustible surfaces).	
IP20		

Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires.

- The ceiling surface must be flat and smooth to ensure a good fit.
- Cut the correct sizes hole using an appropriate tool: See Fig 1.
78530 : 76mm x 76mm
78531 : 79mm x 168mm
78532 : 79mm x 258mm
- It is recommended to cut the hole slightly smaller than needed, then file the hole until the recessed unit fits snugly.
- Ensure that the void depth is a minimum of 150mm.
- The distance between units must be 0.5m minimum.
- The unit must be located a minimum distance of 100mm from a joist.
- Ensure free movement of air by removing void insulation from at least 150mm from around the hole. Under no circumstances must these fittings be covered with insulating matting or similar material.
- Fit the spring clips to the product by squeezing together, and locating over the tabs. Ensure that the bracket with the terminal block is fitted as well.
- This product must be mounted out of arms reach.
- This product has no special protection against the ingress of moisture.
- Replace circuit breaker and switch on. Your light is now ready for use.

