

L 190 S



Exclusive SensorLights in classic lantern design for prestigious exteriors.

High-quality stainless steel (170/180- series) or long-life, intricately ornamented die-cast aluminium (190- series) combined with uncompromising STEINEL multi-sensor technology.


This is how it works

- Integrated soft light start
- Basic brightness can be adjusted from 0 – 50% (Watt-o-matic). When movement is detected, the light switches to full power for the time selected.
- Manual override (4h) at power switch.

Settings

- Reach can be set to a maximum of 12 m or 5 m by turning the multi-lens.
- Detection zone can be limited by fitting the shrouds supplied.
- Comfort function buttons for precision adjustment of light "ON" time, twilight threshold and brightness.

Main features at a glance

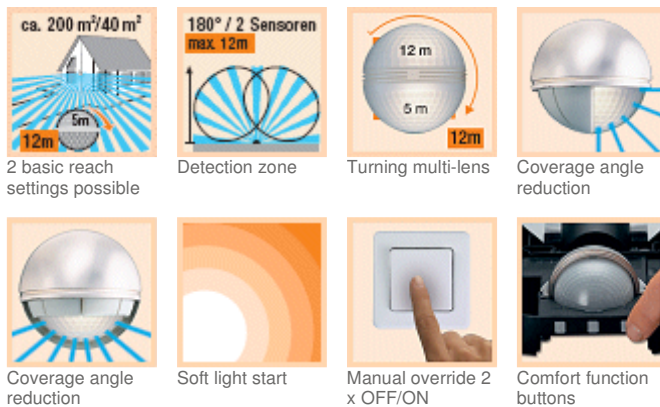

L 190 S

EAN black

4007841 644413

EAN **white**

Dimensions (hxwxd)

Enclosure

Output

Voltage

Angle of coverage

Reach

Twilight setting

Time setting

Brightness control

Manual override

Protection class

4007841 644512

335 x 217 x 147 mm

IP 44

100 W max. / E 27

230 – 240 V / 50 Hz

180° with 90° angle of aperture

12 m max. or 5 m
(temperature-stabilised)

2 – 2000 lux

5 sec. – 15 min.

0 – 50 % (Watt-o-matic)

4 hrs. selectable

II

Subject to technical modifications.