



LED

3000 K



IP44


Panel 180° hor.,
180° ver.networkable via
cable

energy saving

5 years

 manufacturer's
warranty
steinel.de/
garantie5y


CE

Light source not
exchangeableControl gear not
exchangeable30 years (0 4.5h /
day)

3000K warm-white

Function description

Dazzlingly stylish LED floodlight. the outdoor floodlight without sensor. Freely swivelling LED panel with new opal cover for pleasant wide area lighting (1550 lm at 13,7 W). Swivelling range: 180° (horizontally and vertically). Cooling system of high thermal conductivity magnesium composite (HCMC).


Technical specifications

Dimensions (L x W x H)	161 x 180 x 181 mm	Mains power supply	220 – 240 V / 50 – 60 Hz
With lamp	Yes, STEINEL LED system	Power consumption	0,5 W
With motion detector	No	Photo-cell controller	No
Manufacturer's Warranty	5 years	Luminous flux total product	1550 lm
Version	white	Measured luminous flux (360°)	1550 lm
PU1, EAN	4007841033125	Total product efficiency	113 lm/W
Application, place	Outdoors	Colour temperature	3000 K
Application, room	outdoors, all round the building, terrace / balcony, courtyard & driveway	Colour variation LED	SDCM3
Installation site	wall, corner	Lamp	LED cannot be replaced
Installation	Surface wiring, corner, Wall	LED life expectancy (max. °C)	50000 h
Impact resistance	IK03	Service life LED L70B50 (25°)	> 60000 h
IP-rating	IP44	Drop in luminous flux in accordance with LM80	L70B10
Protection class	II	LED cooling system	HCMC (High Conductive Magnesium Composite)
Ambient temperature	-20 – 40 °C	Output	13,7 W
Housing material	HCMC	Colour Rendering Index CRI	= 82


Technical specifications

Cover material Plastic, opal

Dimension Drawing

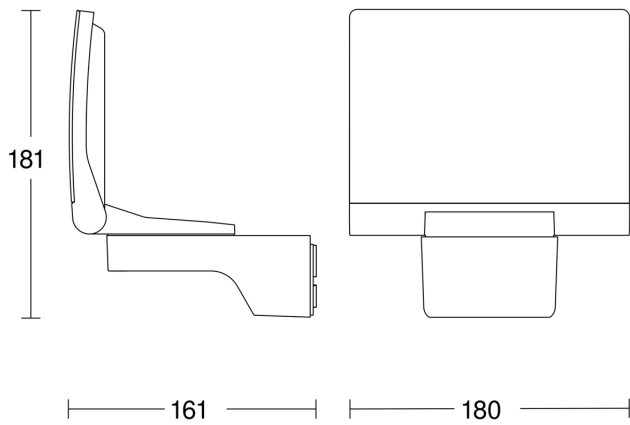

Light Distribution Curve



Output	13,7 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Measured luminous flux (360°)	1550 lm
Colour temperature	3000 K
Colour Rendering Index	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	HCMC (High Conductive Magnesium Composite)

Master/slave interconnection circuit diagram

