

## Commissioning

- Refit the shade to the product with the screws set aside earlier.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.



## Fitting/replacing bulbs

- The LED bulbs in this product are non replaceable



We recommend cleaning with a soft dry cloth.  
Do not use solvents or abrasive cleaners as these could damage the finish.



## Recycling advice



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.




## Safety information

**Live Voltages may be present in this unit even when turned off or when completely disconnected.**  
For your safety, always switch off the power supply before changing lightbulbs, or cleaning.

## Instruction leaflet

# Noble Bathroom Flush

54479, 54487

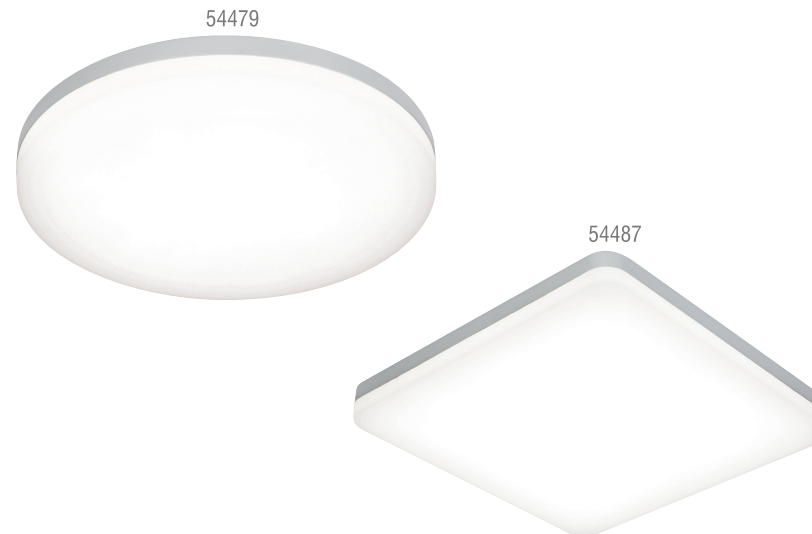

CE

saxby  
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

## Warning

### This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

This product is rated at IP44.


This product is not suitable for dimming.

## Specification

Voltage: 240V 50Hz a.c.  
Lamp: 22W LED module (SMD), 4000K  
IP rating: 44

## Layout

- Plan the desired layout of these fittings carefully, ensuring the cables will reach the distances between each light fitting.
- Avoid locating any cables in positions that would cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.
- This product is suitable for use in outside zones 1 and zones 2 and outside Zones in a bathroom only. Please see diagram.
- If this unit is being fitted in a room containing a bath or shower, a 30mA RCD must be used - in accordance with IEE regulations.

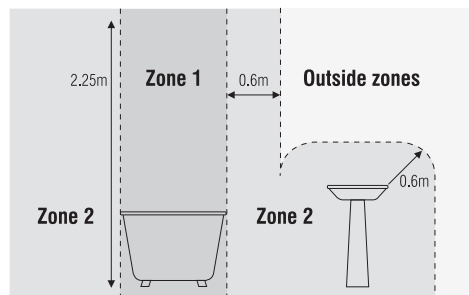


## Installation

Existing fittings must be completely removed before installation of a new product. **Before removing the existing fitting, carefully note the position of each set of wires.**

- Note that the switch is turned off before installation.
- Detach the fixing bracket from the product by removing the side fixing screws.
- Using the fixing bracket as template, mark the position of the mounting holes. Drill holes and fit supplied wall plugs (suitable for masonry only - for other surfaces use appropriate fixings). Attach fixing bracket to ceiling.
- Wire product as detailed below.

## Wiring

Having correctly identified the wiring from your existing light fitting, pull the wire through the hole and connect to the connection block inside the product in the following way:

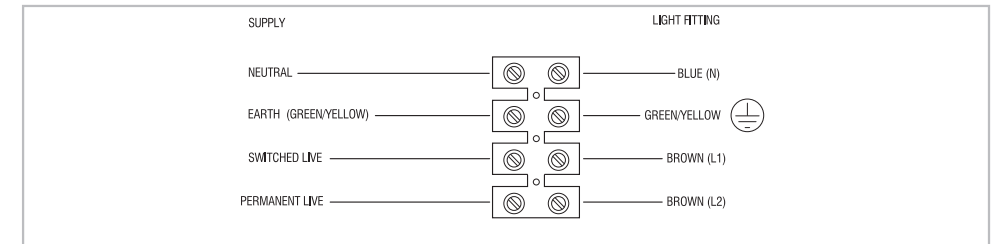

## Check that...

- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the connection block.
- When completed, ensure that there are no bare or loose strands of wire exposed, and cover all exposed areas of the connection block with 2 layers of insulation tape.