

05-6024-81-81

V0

LIRE Wall fixture


Designer: Nahtrang Design



Description

Wall fixture for indoor use.

For frontal lighting and downlighting. Optimum visual comfort. Timeless design. Premium finishes. Embedded/surface mounted double installation. Easy instalation. High durability for intensive use. The optical module can easily be rotated 360°. Structure material: Zamak, Steel. Structure finish: Satin nickel. Warranty: 5 Years. Total years including extended warranty: 5.

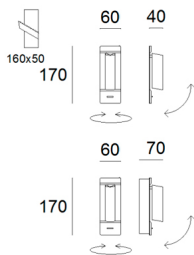

Finish
Satin nickel

Material
Zamak
Steel

IP20 25° 355° 0° a 90° 12

TECHNICAL CHARACTERISTICS

Light source

Light source: LED CREE
Output (W): 2,2W
Total power consumption (W): 3,5
Color temperature: Warm White - 2700K
CRI: 80
Real Lumen: 125
Nominal Lumen: 179
Qty Leds: 1
Lm/Real W: 63
Life Time: 36.000h L70B30
Bin / Grup: 8A3 o 8D2
MacAdam steps: 3 STEPS
UGR: 13.9
Photobiological risk: RG2

GEAR

Brand: EAGLERISE
Gear included: Yes, electronic
Voltage / Frequency:
100-240VAC/50-60Hz
Power Factor: 0.50




Luminaire

Warranty: 5 Years



Logistics

Energy Efficiency: LED A++
EAN Code: 8435381471941
Net Weight (Kg): 0.715
Weight in Kg (packaged): 0.879
Packing: 210 x 100 x 100
Masterbox: 12


The photograph may not match the reference exactly. Please read the product description to identify the finish.

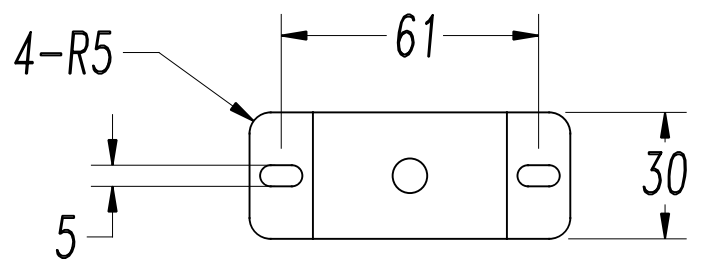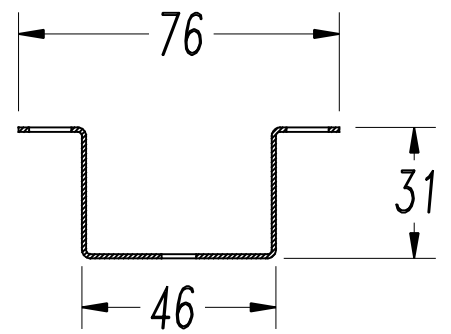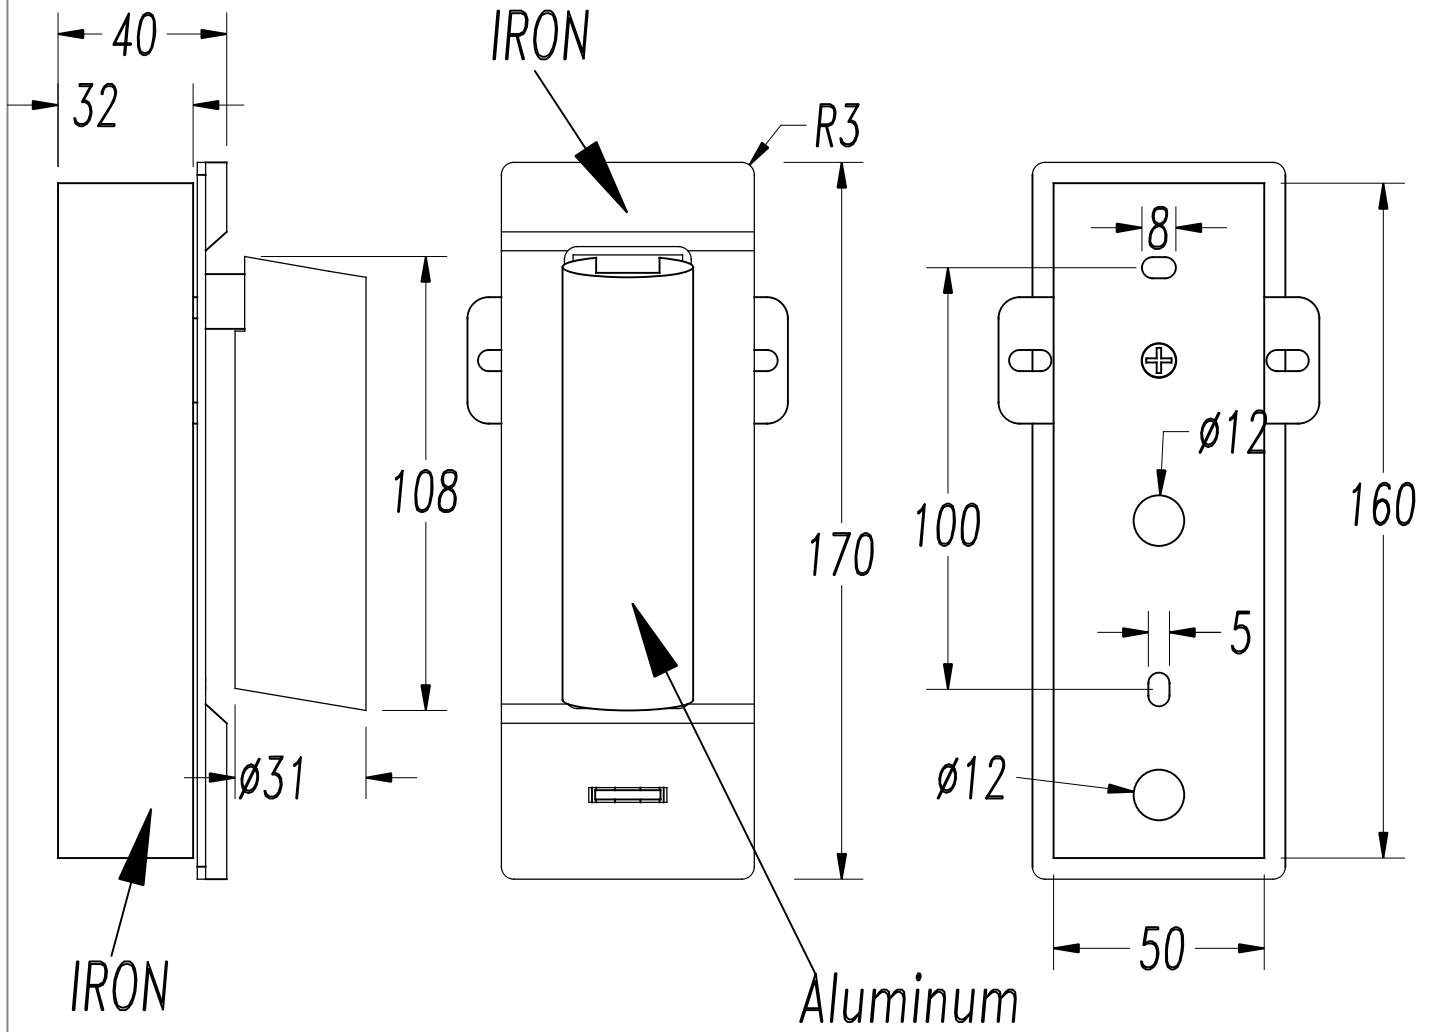


1

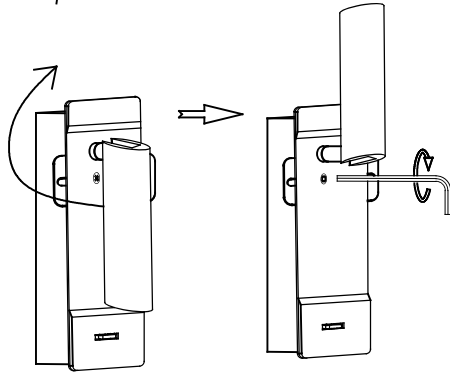


2

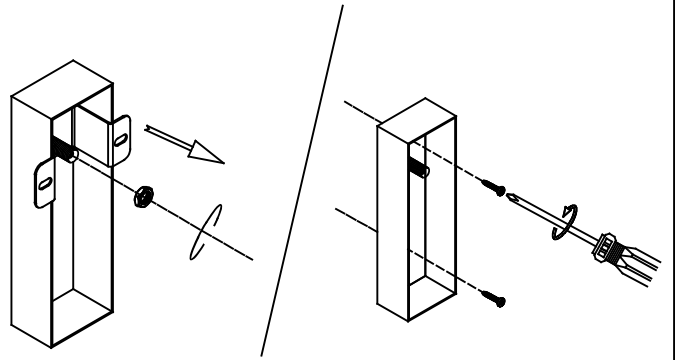



3

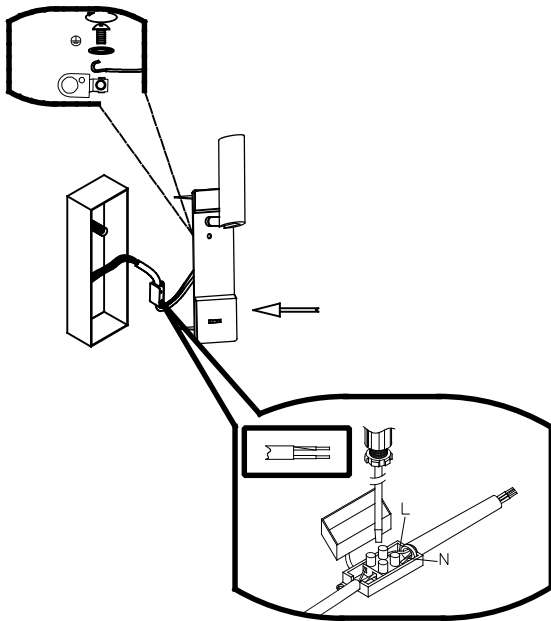


4


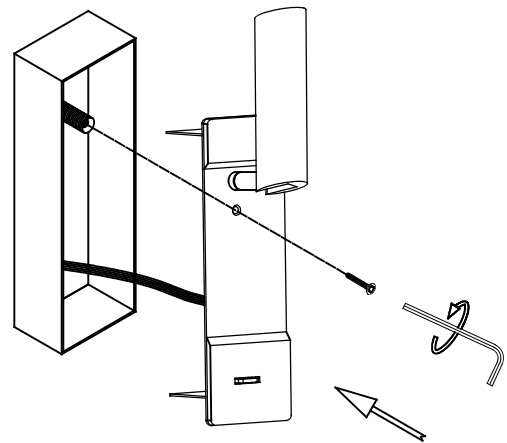


5

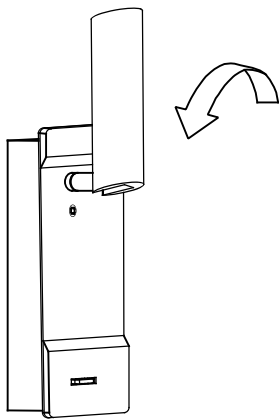


6

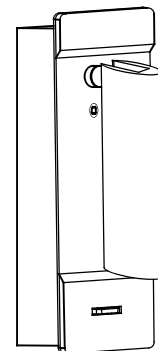


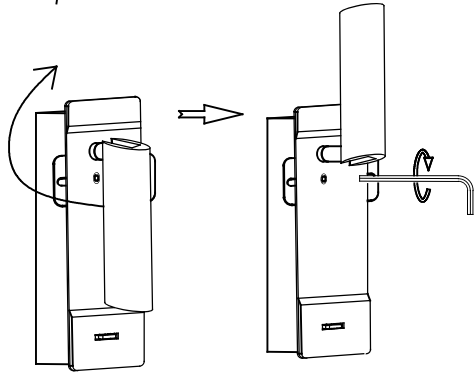


2

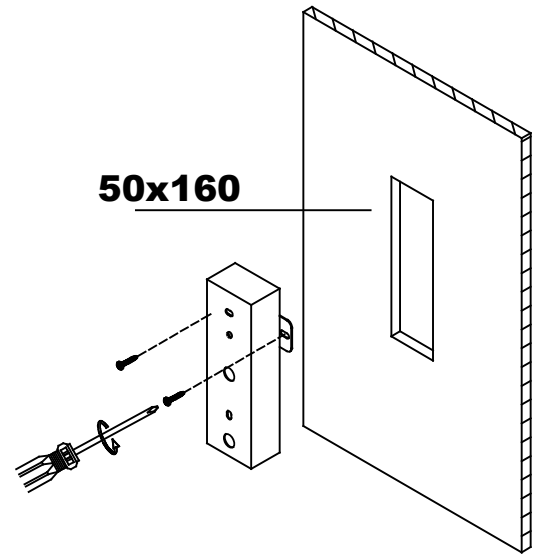

3


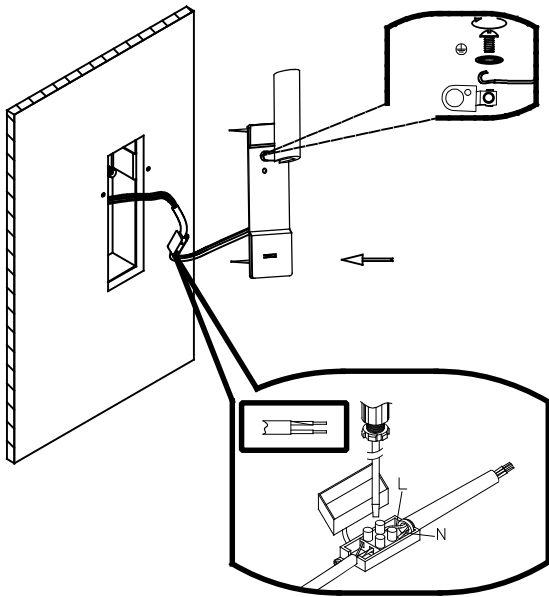


4

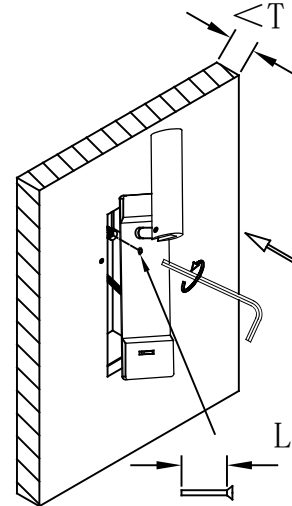

T = 10 L= 25
T = 25 L= 40
T = 35 L= 50

5

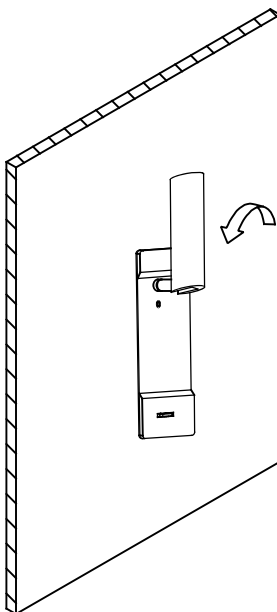

6

